



PARRY MICRO CONCRETE ROMAN II ROOF TILE: SPECIFICATION OF PRODUCT AND DESCRIPTION OF PRINCIPAL EQUIPMENT



EXAMPLE OF ROOF

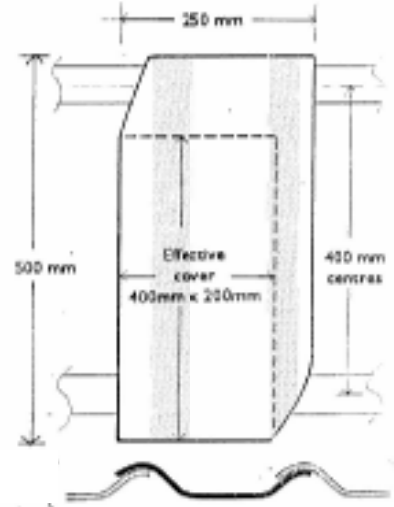

ROMAN II MOULD WITH OVERLAP AREAS SHADED

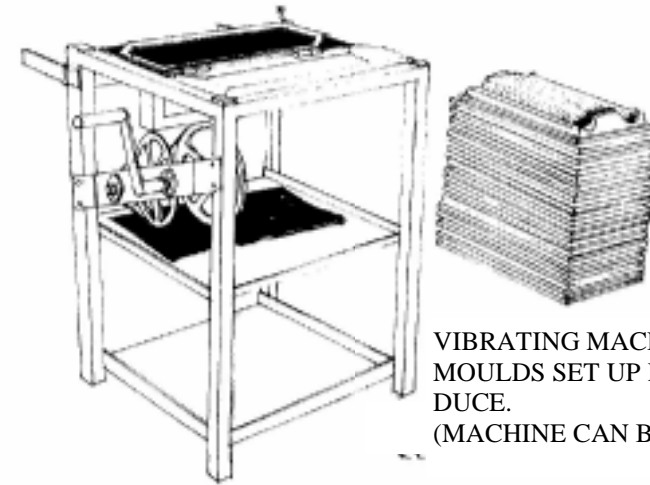

VIBRATING MACHINE AND MOULDS SET UP READY TO PRODUCE.
(MACHINE CAN BE POWERED BY 12

ROMAN II MOULD



THE TIMBER FRAME CAN BE SUPPLIED OR SOURCED LOCALLY

MICRO CONCRETE TYPICAL MIX (Cement 25%, Sand 25% and Gravel 50%)


Thickness	6mm, 8mm or 10mm
Weight per tile	3.8, 4.8 and 5.4 kg
Weight per m ²	30, 38 and 43 kg
Actual tile size	500 x 250mm
Coverage	12.5 tiles per square metre of roof
Effective cover of roof	400 x 200mm
Thermal Conductivity	0.5 W/m C
Roof pitch	22.5 to 45 degrees. Lower pitches can be used in mild climates with no incidence of wind-blown rain.



MOULDS FOR OVERLAPPING RIDGE TILES ALSO SUPPLIED IN ALL PLANTS



All production plants include a variety of ancillary items to facilitate the manufacturing process. One of these is a mortar measuring scoop which controls the quantity of materials used to make each tile.



Quality Control gauge - for checking the shape of the tile prior to curing. Also used for demoulding tiles - minimises breakage rate.