




PARRY MICRO CONCRETE SUPER ROMAN ROOFING TILE: SPECIFICATION OF PRODUCT AND DESCRIPTION OF PRINCIPAL EQUIPMENT

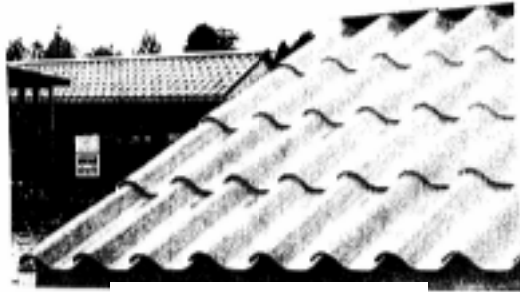

EXAMPLE OF ROOF

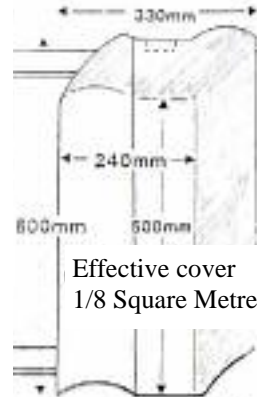

SUPER ROMAN TILE WITH OVERLAP AREAS SHADED

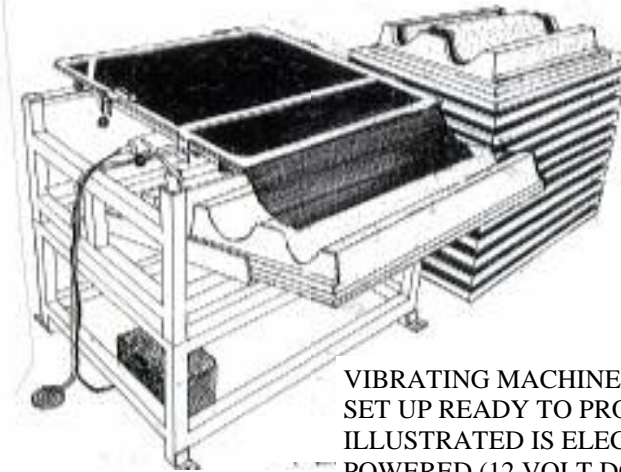

VIBRATING MACHINE AND MOULDS SET UP READY TO PRODUCE. MACHINE ILLUSTRATED IS ELECTRICALLY POWERED (12 VOLT DC). EQUIVALENT MANUAL VERSION AVAILABLE.


MICRO CONCRETE TYPICAL MIX (Cement 25%, Sand 25% and Gravel 50%)

Thickness	8mm or 10mm
Weight per tile	4.5 to 6 kg
Weight per m ²	36 to 48 kg
Actual tile size	600 x 330mm
Coverage	8 per square metre of roof
Effective cover of roof	500 x 240mm
Thermal conductivity	0.5 W/m C
Roof Pitch	22.5 to 30 degrees. Lower pitches can be used in mild climates with no incidence of wind-blown rain



MOULDS FOR OVERLAPPING RIDGE TILES ALSO SUPPLIED IN ALL PLANTS

SUPER ROMAN MOULD



THE TIMBER FRAME CAN BE SUPPLIED OR SOURCED LOCALLY



QUALITY CONTROL EQUIPMENT

All production plants include a variety of ancillary items to facilitate the manufacturing process. One of these is a mortar measuring scoop which controls the quantity of materials used to make each tile.