



MULTIVIBE & HAND POWERED BUILDING MATERIALS PRODUCTS

NEW 'I' BLOCK PAVING

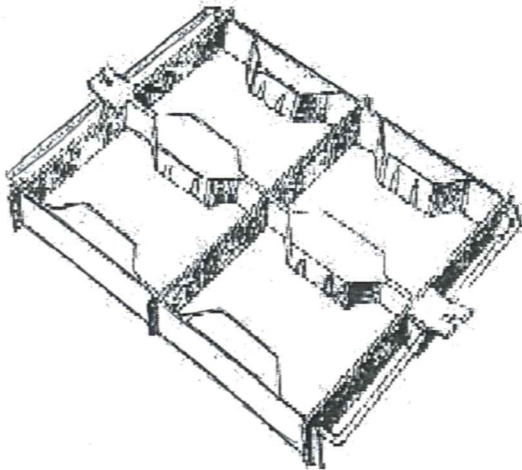

CONCRETE PAVING BRICKS INFORMATION SHEET

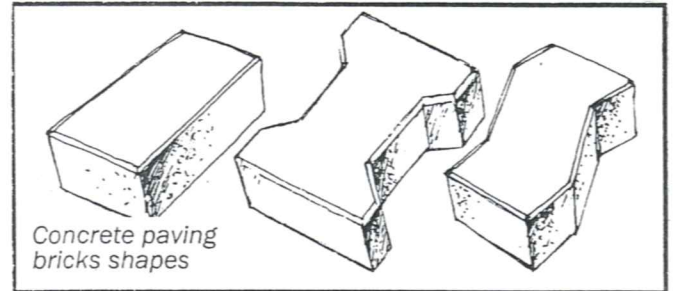

The equipment needed to produce Parry 'I' blocks are as follows:-

- A large format vibrating table
- A 4-impression steel mould, c/w pusher plate (for repeatable use)
- Steel Stacking Bases (for transfer and stacking) NB: The 'I' block product can also be de-moulded onto the floor without using this stacking equipment
- Stacking Base retaining frame
- A trowel
- A measuring scoop

The mixture for 'I' blocks is 1 part cement, 4 parts sand and 5 parts gravel (not larger than 6 mm in diameter).

The mixture should be fairly dry, allowing the option to add water during the manufacturing process.

The de-moulding agent should be 1 part engine oil to 4 parts Kerosene.

Indicative Prices

1 x Large format vibrating table	= £915
1 x 4-Impression steel mould	=£300
10 x Steel stacking bases	=£27.50 each (quantity to suit requirements)
1 x Stacking base retaining frame	=£56

All above prices ex-works unpacked.

ALSO AVAILABLE :- 6-impression 'Z' block steel mould c/w pusher plate. 6-impression Rectangular (these patterns can be turned out directly onto the floor and the moulds used repeatedly during the day and cost £350 each).

